




## How to Replace RC1 Circuit Board for Starling and Saker Series

### Replacement Process

Remove the left side cover of the housing by removing the screws.

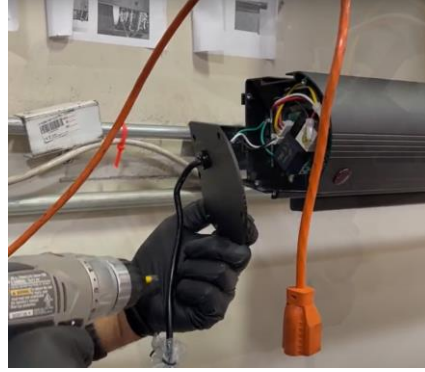

Unplug both connection ports from the circuit board. Then remove the three screws surrounding it.



Replace the circuit board and align it with the back cover. Next, move the switch to the “right” position for down/up screen type



Re-install the circuit board back into the housing. Place back the surrounding screws on the circuit board



Plug both connection ports on the new circuit board. Then, Plug the screen into a power outlet and check that the circuit board lights up



Reattach the left side cover to the housing



### **Test the Circuit Board**

Plug in the Wall-Box controller and test the up/down/stop functions

The process is now complete

Scan for Video

