
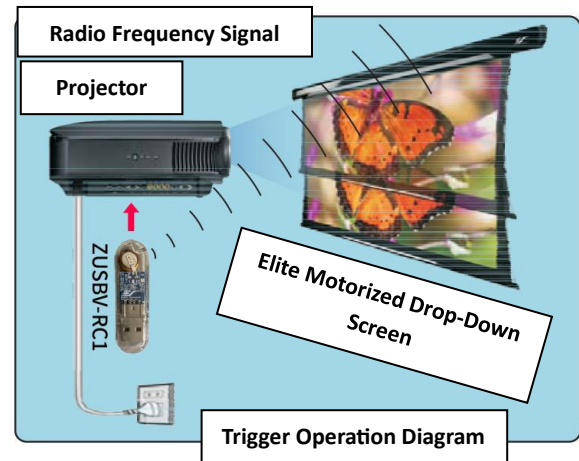


1. Product Description

Elite Screens' **ZUSBV-RC1** is a wireless USB Projector Trigger. It plugs into a projector's USB power port to automate the operation of any Elite Screens' electric projection screen utilizing the SWIFT-RC1™ control system.

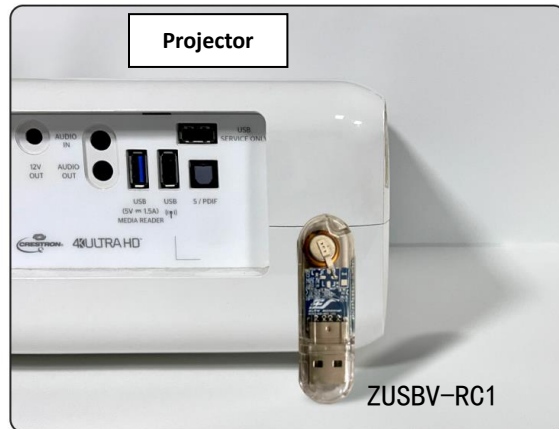

2. Programming Instructions

① **Code learning(pairing):** Connect the wall box controller to the screen. **Press & hold** the **"Programming"** key (located on the back), **then** press the **"UP"** key on the wall box controller to enter the learning mode.

Press & hold the **"Setting"** button on the **ZUSBV-RC1** for 3 seconds, then the wall box controller light will disappear indicating the code learning is successful. The screen will now drop/rise with the projector's power cycle.

Note: After using the **ZUSBV-RC1** to learn the code, the RF code on the back of the **RF remote control** must be set to "000" mode to continue using it.



② **Reverse direction RISE/DROP: (For use with floor-rising electric screens)**

Press & hold the **"Setting"** button for about 10 seconds until a flashing light appears, **then** release the **"Setting"** button and press it again to set the direction change.

Note: After programming the reverse function, the direction of the projector's on/off action of the screen will be affected. This feature is only available for Elite's Kestrel Series floor-rising electric screens that also utilize the SWIFT-RC1™ control system.

How to use the ZUSBV-RC1:

Connect the ZUSBV-RC1 trigger to the USB 5V output port of the projector to enable the screen operation to synchronize with the projector's power cycle.

✂The effective control range of the trigger is within 49 ft (15 meters).

✂Elite Wireless Radio Frequency USB 5V Projector Trigger can only be used with Elite Screens motorized screens with the SWIFT-RC1™ control system.

For technical support, email us at techsupport@elitescreens.com

www.elitescreens.com