

Evanesce Tab-Tension B CineGrey 5D®


ALR Electric In-Ceiling Projection Screen



Compatible Standard Throw Projectors ONLY

Product Description

The **Evanesce Tab-Tension B CineGrey 5D®** is an in-ceiling electric projection screen designed for integrated ceiling installations. It utilizes our CineGrey 5D® ambient light rejecting material for superb performance with the lights on or off. The tab-tensioned material provides uniform flatness over the entire projection surface with superb color saturation, contrast and black/white dynamic range. Standard controls include IR/RF remotes and a 5-12 volt projector trigger. The material rapidly drops and rises using a smooth and quiet tubular motor.

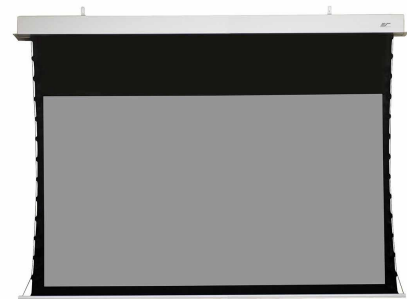

Models	Diagonal	Aspect Ratio	View Width	View Height	Material	Gain	Case Color	Top Border
ETB103HD5-E8	103"	16:9	90.0 in	50.7 in	CineGrey 5D®	1.5	White	8 in
ETB106HD5-E16	106"	16:9	92.7 in	52.0 in	CineGrey 5D®	1.5	White	16 in
ETB115HD5-E8	115"	16:9	100.4 in	56.6 in	CineGrey 5D®	1.5	White	8 in
ETB126HD5-E10	126"	16:9	125.4 in	61.8 in	CineGrey 5D®	1.5	White	10 in

For full list of models visit www.elitescreens.com

Product Features

- CineGrey 5D® 1.5 Gain Ambient and Ceiling Light Rejecting material
- Multi-layer matrix uses reflective and absorbent micro-particles to eliminate up to 75% of ambient light
- High-contrast diffusion layers (Enhances black level dynamic range and color saturation)
- Angular reflectivity negates light scatter artifacts and is ideal for residential or commercial applications
- ISF Certified for accurate Color reproduction
- 4K/8K Ultra HD and HDR Ready
- Available in diagonal sizes 103", 106", 115", 126" and 133" in 16:9 aspect ratio
- Black masking borders absorb projector overshoot while enhancing visual contrast
- Disappearing "in-ceiling" design for multi-purpose media rooms
- Below or Above ceiling access accommodates installations from within the room or ceiling space
- Tab-tension designs maintains uniform screen flatness
- White enameled aluminum housing is durable and moisture resistant
- Internal Infrared and Radio Frequency receivers with IR/RF remotes included
- Standard 5-12-volt projector trigger to synchronize with projector
- 2-Year / 3-Year ENR-G Manufacturer's Warranty by Elite Screens