


Dry Contact (Direct Control)

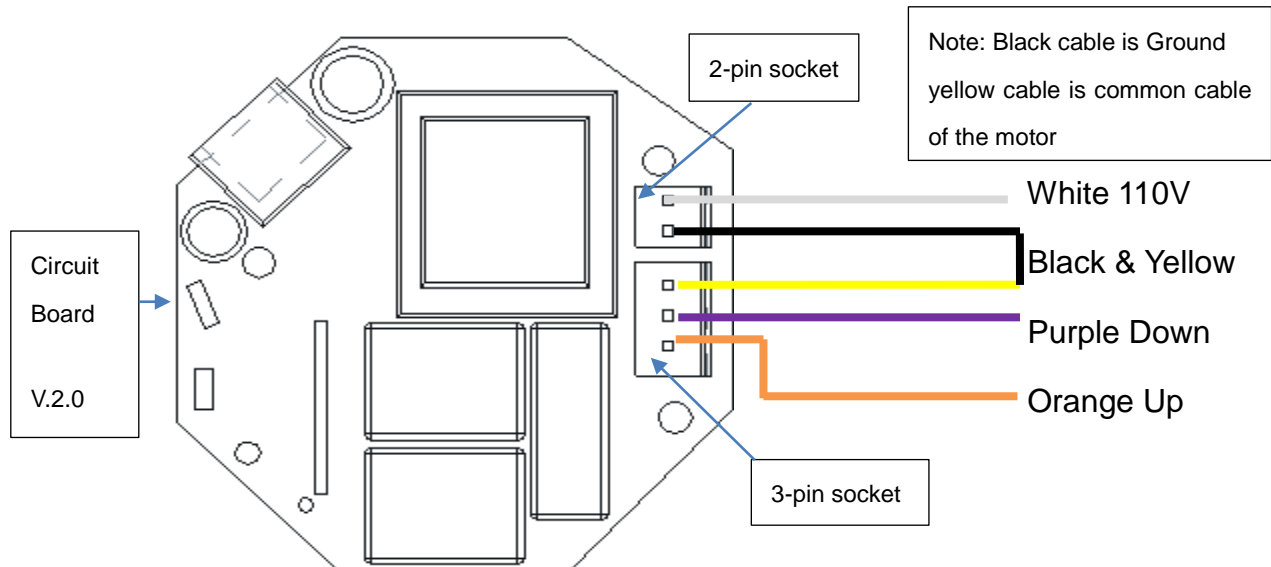

Follow the steps below to achieve a direct control connection between the projection screen and a direct control device.

Step 1: Remove the Left End Cap (as you face the front of the screen)

Step 2: Wire 3PIN-Yellow and 2PIN- Black together

Step 3: Connect 2PIN-White to 110V

Step 4: Connect 3PIN-Orange wire to **Up** Control

Step 5: Connect 3PIN-Purple wire to **Down** Control

Applies to all Series: Spectrum, VMAX 2, Home 2, CineTension 2, VMAX Plus3/4, Evanesce, Aerie Tension.