











# Yard Master Series | Model: OMS150/180H | User's Guide


## What's in the Box

<b>A. Screen material x 1</b> 	<b>B. OMS150H / OMS180H Steel tube x 16</b> 	<b>C. Curved Stake x 4</b> 
<b>D. Ring-Stake x 4</b> 	<b>E. Guy-Rope x 4</b> 	<b>F. M6*40 hex nut x 2</b> 
<b>G. M6*40 hexagonal screw x 2</b> 	<b>H. Carrying case x 1</b> 	<b>I. Lock Pins (Spare parts) x 5</b> 

## Frame Assembly

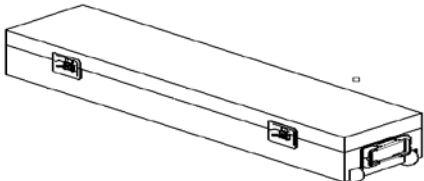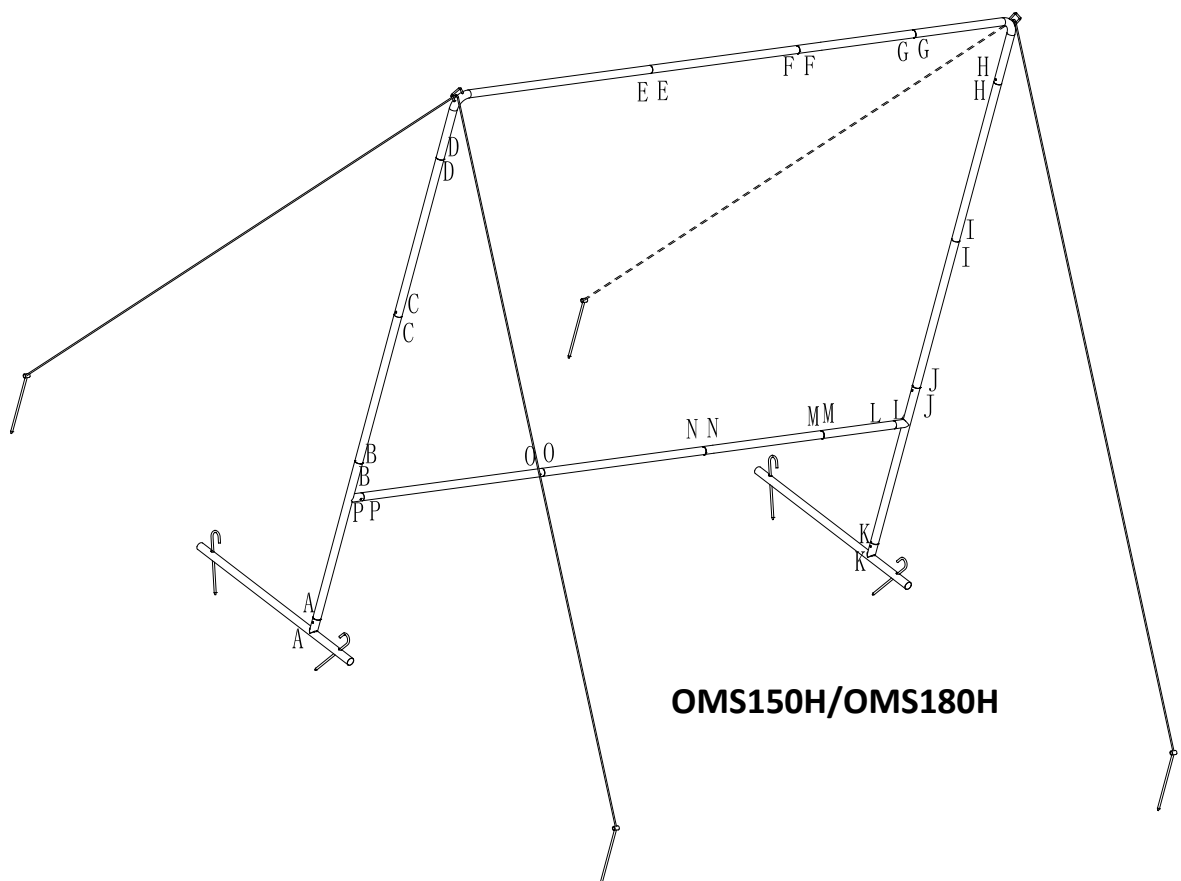

1. Start the assembly by matching the letters on the ends of the tubes and connect them together as show on diagram above. **For example, A to A, B to B etc.**
2. E and Gare to be attached and secured with the provided hexagonal screws.  
**Note:** This step is done near the end of the assembly.

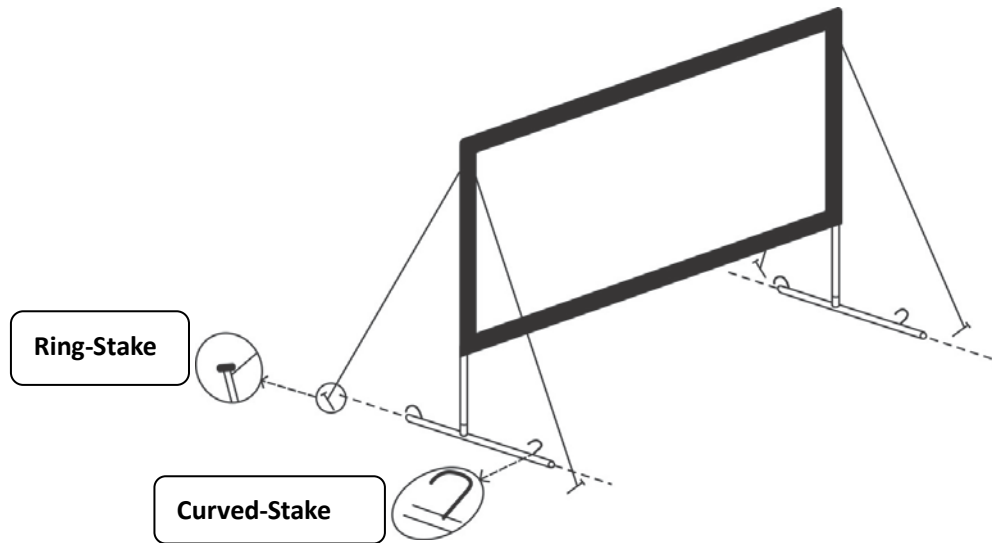

**Caution:**

1. The Ring-stakes and Curve-Stakes should be properly driven into the ground to avoid the frame from falling over which could result in personal injury and/or permanent damage to the screen.
2. We do not recommend the use of this product in gusty winds of over 20mph.

**Maintenance:**

1. Soft cloth with mild soap & water may be used to clean the screen's surface.
2. To prolong the lifespan of this product, store it in its carry case when not in use.

For a local Elite Screens contact or Technical Support, please visit

[www.elitescreens.com](http://www.elitescreens.com)