


## Circuit Board Replacement Instructions For ZZ Type Electric Screens

**ATTENTION:** Please make sure the version number and the Voltage of the circuit board matches the version number and the Voltage of the screen. Elite Screens does not recommend making unnecessary adjustments to the screen, **as improper adjustments will damage the unit and void your warranty**.

Make sure to unplug the screen from the power before starting the replacement process.

Step 1. Carefully remove the decorative sheet by pulling it outward towards the open end.

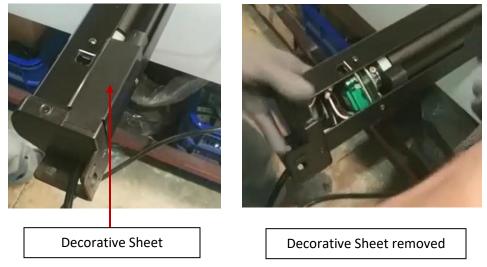


Step 2. After removing the decorative sheet, remove the screws on the left end cap (facing the screen) with a Phillips screwdriver, then remove the end cap.







Step 3. Press in the clip on the white terminal, then pull out to remove the two white terminals.

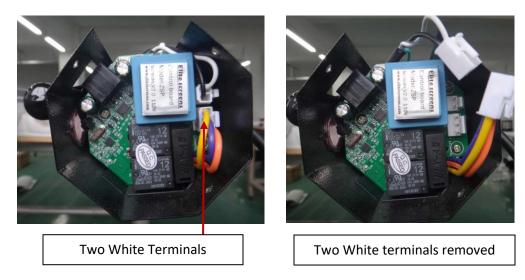

Step 4. Remove the three screws that secure the circuit board with a Phillips head screwdriver. Set the screws aside to later secure the new circuit board. *Note: Keep in mind how the ground wire is connected, as this will be needed at a later step.* 

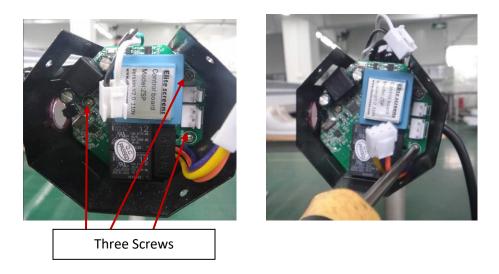

Step 5. Utilize the saved screws to secure the new circuit board in same location of the previous.



Step 6. Insert the two sets of white terminals into the new circuit board.





Step 7. Make sure the ground wire is connected , then replace and secure the end cap with screws removed in step 4.





Step 8. Replace the decorative sheet removed in step 1.



**NOTE:** After replacing the circuit board, the original screen RF remote control needs to be resynchronized: 1. While the screen is unplugged, press and hold the "stop" button on the RF remote control and quickly plug in the screen. 2. Wait for 5 seconds to release the "stop" button. (The indicator on the remote control will flash.) At this point the RF remote control can control the screen.

## For a local Elite Screens contact or Technical Support, please visit

www.elitescreens.com

or contact us at

service@elitescreens.com