


Screen Installation


A. Flush Wall Installation

1. Measure the distance of the keyholes on the end caps and mark the location of where the screen is to be installed for the pre-drilled hole.
Note: You can also refer to the dimensions table on the website for this measurement (www.elitescreens.com/manual)
2. Drill a hole in the marked areas, insert the proper screw and leave about 1/8 of an inch from the wall to mount the screen.
3. Mount your screen from the keyhole located on the back of the screen's left and right end caps.

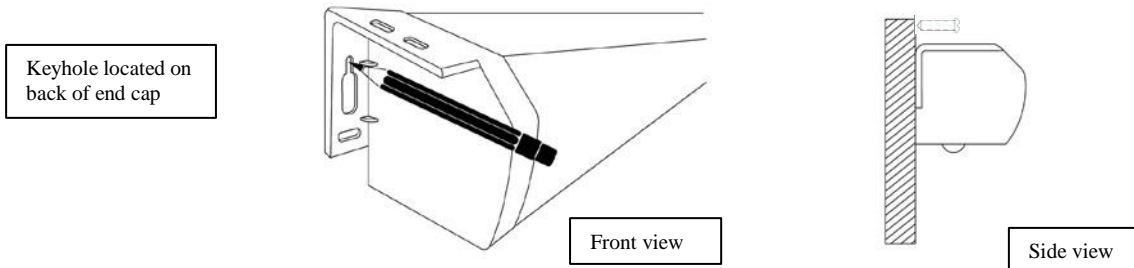

B. Flush Ceiling Mounting

1. Remove D-rings from the left and right end caps.
2. Measure the distance between the top screw holes located on top of the end caps.
3. Mark the location of where the screen is to be installed for the pre-drilled hole.
4. Drill your hole, use a hollow wall anchor if needed
5. Insert the proper screw into the drilled hole and secure the screen to the ceiling.

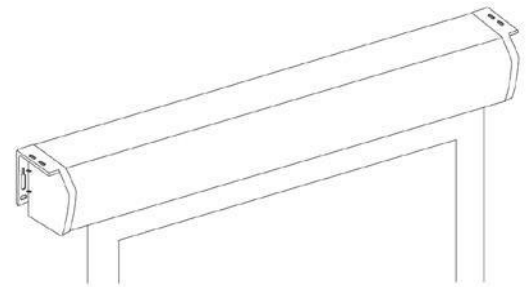


C. Suspended Ceiling Installation

1. Hang the screen from the ceiling using chains (not included) and hooking them to the D-ring located on each end cap.

Note: D-rings or U-bolts are not included with models above 135" due to weight capacity.

Note: Please consult with a hardware store professional for proper screws for your specific wall or ceiling installation. The installer must ensure that proper mounting hardware and fasteners used are of adequate strength and suitable for the mounting surface.

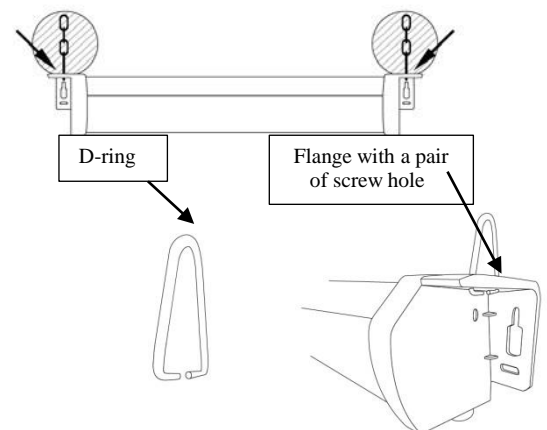


Screen Operation

Hydraulic SRM Disclaimer: The Manual Series uses a Hydraulic SRM (Slow Retract Mechanism) that allows the screen to retract back into the casing unassisted. However, the friction caused by repetitive operation heats up the hydraulic fluid causing it to temporarily lose its motion-arresting capability. If this occurs, please let the screen stand for 30 minutes to allow the fluid to cool and resume its SRM function.

1. Pull the screen down from the lanyard or from the handle only at a 90-degree angle. The screen is designed to lock at different intervals. To achieve this, make sure to pull straight down and allowing the screen to come up to lock into place. **Do not attempt to pull the screen down by the surface or touch the screen, as it will damage the screen and void the warranty.**

2. To retract the screen, simply pull the screen down more than two inches with a quick snap of the wrist and allow the screen to slowly retract itself back up into the housing.

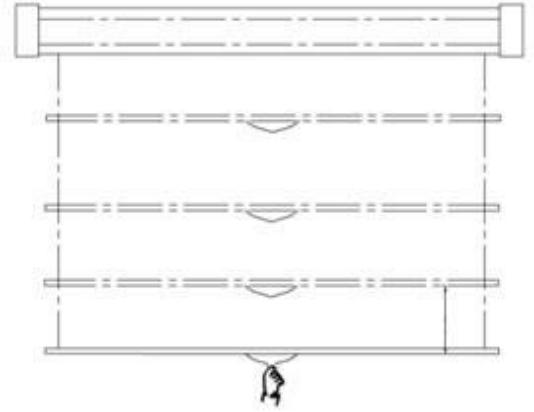

Attention: When retracting, always pull the screen down at a 90-degree angle. If ever the screen feels stuck, keep in mind that the screen's mechanism is new and needs to be run up/down a few times to loosen up. If this happens, carefully, with a little force, yank the screen straight down to unlock the mechanism.

RETRACTION TIP: If you are not able to pull the screen down two inches when attempting to retract it, give the screen a quick yank downwards with a little bit of force. Please be sure to not stand directly under the housing of the unit when yanking down on the screen.

For more information or for tech support, please visit www.elitescreens.com

On-Line User Guide or Download

线上说明书或下载 / 線上說明書或下載
オンラインユーザーマニュアル / ダウンロード
Manual del usuario on-line o descargar
On-Line-Benutzerhandbuch oder Herunterladen
Manuel de l'utilisateur en ligne ou télécharger
On-Line manuale d'uso o download
ออนไลน์ใช้ ขคมหรือดาวน์โหลด



On-Line Руководство пользователя или скачать
On-line Manual de utilizare sau de descărcare
Hướng dẫn sử dụng trực tuyến hay tải xuống
على ال خطدل ي لال م س ت خ دم أوت حم ي ل
ऑनलाइन उपयोगकर्ता के
मैनुअल या डाउनलोड

온라인사용자설명서또는다운로드

On-Line Instrukcja obsługi lub pobierania
On-Line Manual do Usuário ou Download
Buku Panduan Online atau unduh



www.elitescreens.com/UG